



ROYER SF-24V

Vacuum Tube Stereo Coincident Ribbon Microphone

The SF-24V vacuum tube stereo ribbon microphone is the pinnacle of our SF-series stereo microphones. The sound pickup is lush, smooth and natural, with outstanding stereo imaging and superb transient response. The tube electronics provide increased midrange reach, unmatched clarity and detail, and an airiness previously unheard of in ribbon mics. Utilizing the same proprietary tube electronics as in our TEC Award winning R-122V ribbon microphones, the SF-24V delivers the ultimate in stereo ribbon miking for the true connoisseur of recorded sound.

The SF-24V's independent tube circuits provide an output level of -38 dB, suitable for use with any professional preamplifier. With self-noise of lower than 18 dB, the SF-24V's ultra-quiet operation is suitable for the most demanding classical and acoustic recording applications

Like an SF-12, the SF-24V is actually two matched ribbon microphones, placed one above the other in a coincident pair, each aimed 45 degrees from center in the classic Blumlein configuration. The magnet/pole piece structure of each ribbon transducer delivers a wide, uniform frequency response with no substantial peaks or dips, and the 1.8-micron ribbons produce superb transient response. Frequency response is excellent regardless of the angle of sound striking the ribbons and off-axis coloration is negligible

SF-24V FEATURES

- Vacuum tube circuitry provides high output and impedance matching
- True stereophonic (Blumlein and M-S) recording from one coincident microphone
- High SPL capabilities
- No distortion up to maximum SPL rating
- Extremely low residual noise
- Ribbon elements are not affected by heat or humidity
- Absence of high frequency phase distortion
- Equal sensitivity from front or back of elements
- Consistent frequency response regardless of distance
- High efficiency, matching toroidal transformers
- Very low magnetic leakage

RECOMMENDED APPLICATIONS

- Orchestra
- String Sections
- Solo Strings
- Brass and Woodwinds
- Acoustic Piano
- Harp
- Choirs
- Drum Overheads
- Percussion Instruments
- Acoustic Guitars
- Large & Small Ensembles
- Ambiance
- Stereo to Mono



Reduced Size

ROYER SF-24V





Technical Specifications



Acoustic Operating Principle	Electrodynamic pressure gradient with vacuum tube
Vacuum Tube	2 JAN mil-spec 5840W pentodes wired in triode configuration
Polar Pattern	Symmetrical figure-8's
Generating Element	Two 1.8-micron aluminum ribbon
Frequency Response	30 - 15,000 Hz \pm 3dB
Sensitivity	-38 dB (re. 1v/pa \pm 1dB)
Self-Noise	< 18 dB
Output Impedance	450 Ohms @ 1KHz
Recommended Load Impedance	1500 Ohms or greater
Maximum SPL	>130dB
Microphone Output Connector	Male XLR 5-pin (Stereo)
Power Supply Output Connectors	Two 3-Pin Male XLR connectors
Power Requirements	Plate supply: 135 VDC @2ma, Filament supply: 6 VDC@ 150ma from dedicated power supply.
Dimensions	270mm X 39mm (base) X 25mm (top) (10 5/8" X 1.5" X 1")
Weight	583 grams (20.5 oz)
Finish	Dull Satin Nickel, Optical Black finish optional
Accessories	Power supply, Protective wood case, 25' Cable (XLR5 to 2 standard 3-pin XLR male), shock mount
Microphone Warranty	Lifetime to original owner. Vacuum Tube: 10 years (repair or replace at Royer's option)
Ribbon Element Warranty	First re-ribbon free to original owner within first year of purchase.



Frequency Response and Polar Pattern

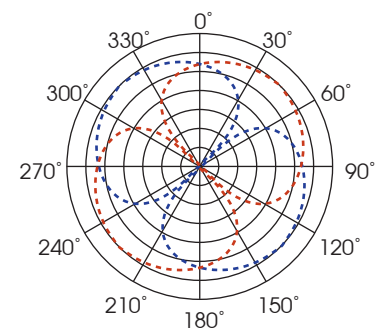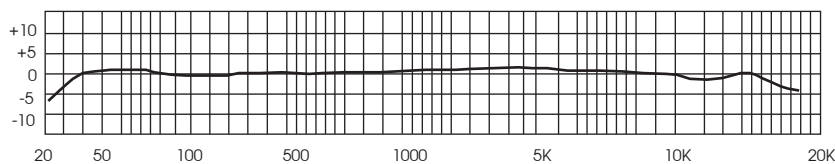

--- Upper Element
 --- Lower Element

Royer Labs
www.royerlabs.com

2711 Empire Ave, Burbank, CA 91504
 Tel. (818) 847-0121 Fax (818) 847-0122

COPYRIGHT ROYER LABS 2019
 All specifications subject to change without notice